



Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

 Creation Date:
 17-12-2018


 Datasheet No:
 DS704W

 Parker Part No:
 938276Q

 OEM:
 Hydac

 OEM Part No:
 0165R020BN4HC

Product Dimensions			
A (mm)	60.0	(inch)	2.36
C (mm)	34.2	(inch)	1.35
D (mm)	60.0	(inch)	2.36
E (mm)	228.5	(inch)	9.00
G (mm)	36.0	(inch)	1.42
H (mm)	13.5	(inch)	0.53

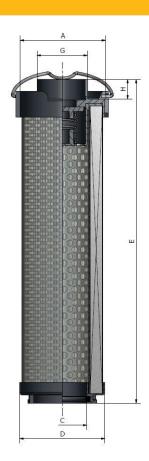



Construction Materials

Seal(s):	FPM: Fluoroelastomer	
Top Endcap:	Glass reinforced nylon	
Bottom Endcap:	Glass reinforced nylon	
Inner Support Cylinder:	Mild steel tin plated	
Filter Media:	Multilayer fibreglass with coated mesh on both sides	

Calculated Performance Criteria

 Differential Pressure (Δp):
 0.30 bar @ 120 l/min

 Tested to ISO3968 @ 32 cSt
 4.35 psi @ 26.40 gpm

Efficiency: >Beta 200 @ 20 microns & greater

>Beta 1000 @ 22 microns & greater

Minimum Collapse Pressure: >20 bar **Tested to ISO2941** >290 psi

Dirt Holding Capacity acc. to ISO16889

9.8 gram @ 4 bar terminal pressure drop9.8 gram @ 58 psi terminal pressure drop

