



## Interchange Element Data Sheet

(inch)

(inch)

(inch)

(inch)

3.15

1.70

3.15

4.57

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date: 17-12-2018

Datasheet No: DS138W

Parker Part No: 926841Q

OEM: Pall

OEM Part No: HC9600FKN4H&Z

Product Dimensions

0.08

43.2

0.08


116.0

A (mm)

B (mm)

D (mm)

E (mm)

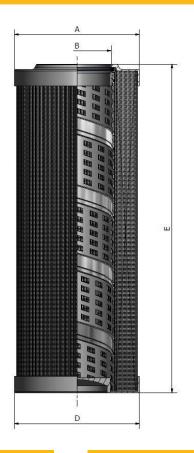



Construction Materials	
Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Glass reinforced nylon
Bottom Endcap:	Glass reinforced nylon
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

## **Calculated Performance Criteria**

 Differential Pressure (Δp):
 0.09 bar @ 100 l/min

 Tested to ISO3968 @ 32 cSt
 1.35 psi @ 22.00 gpm

Efficiency: >Beta 200 @ 6 microns & greater

>Beta 1000 @ 7 microns & greater

**Minimum Collapse Pressure:** >20 bar **Tested to ISO2941** >290 psi

**Dirt Holding Capacity acc. to ISO16889** 

>31.6 gram @ 7 bar terminal pressure drop >31.6 gram @ 102 psi terminal pressure drop

