

CEMO DT MOBIL EASY


Innovative diesel filling stations offering a wealth of useful features.

Diesel



adjustable lid mount

The adjustable lid mount allows it to be installed either on the left or the right for the best possible access (460 L and 600 L).

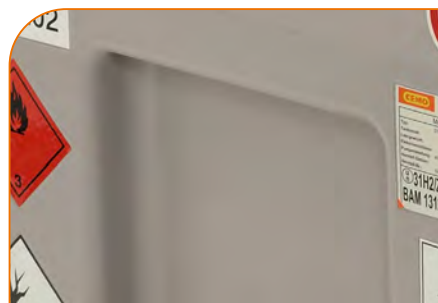

built-in ergonomic carry handles

The built-in carry handles enable the equipment to be handled easily during loading.



integral forklift pockets

The integral forklift pockets make handling easier when the tank is full.



built-in hose brackets

The built-in hose brackets keep things tidy until you next need to fill up.



dispensing hose can be isolated

The isolation valve enables the container to be sealed off completely, thus adding to safety during transportation (125 L, 200 L, 460 L, 600 L, 850/100 L and 980 L).



Video
DT-Mobil EASY



recesses for ratchet tie-down

Integral recesses (125 L, 200 L 210 L and 440 L) and lashing eyes (460 L, 600 L, 850 L/100 L and 980 L) to allow immobilisation with a ratchet lashing strap during transportation.



folding crane eye and lashing eyes

The folding crane and lashing eyes (460 L, 600 L, 850 L/100 L and 980 L) make it easier to secure the load in the prescribed manner, and serve at the same time as fastening eyes if the device is lifted by crane.

CEMO DT MOBIL EASY 125 L and 210 L PG 4 ACCORDING TO ADR 1.1.3.1 C)

DT-Mobil EASY

Certified for transport for immediate consumption according to ADR1.1.3.1 c)

Container:

- single-walled 125 L, 210 L, 440 L and 440/50 L polyethylene
- integral dispensing nozzle holder
- integral filler neck
- integrated vent with pressure relief
- integral forklift pockets and handles
- integral recesses for ratchet straps during transport

Pre-fitted pump:

- self-priming pump 24 V DC, 40 L/min, with automatic nozzle, 4 m dispensing hose DN 19 and 4 m electric cable
- submersible pump CENTRI SP30, 12 V, 30 L/min, extremely quiet, with automatic nozzle, 4 m dispensing hose DN 19 and 4 m electric cable or CAS battery
- hand pump 25 L/min, 2.7 m dispensing hose DN 19 and manual nozzle



210 L with pump 12 V



CENTRI SP30
EXTREMELY QUIET



210 L with 12V submersible CENTRI SP30 12 V and hinged lid

Diesel



210 L with pump 12 V



125 L with hand pump

TOP SELLER

DT-Mobil Easy 210 litre with CENTRI SP30 pump

Packages:

- without hinged lid: order no. 10978
- with hinged lid: order no. 10981



210 L with CENTRI SP30 12 V and CAS battery



210 L with CENTRI SP30 18 V and CAS battery

NEW

CAS COMPLETE ALLIANCE SYSTEM

DT-MOBIL EASY ACCORDING TO ADR 1.1.3.1 C)

Description	Capacity L	Dimensions in cm (l x w x h)	Weight approx. kg	Order no.
Hand pump and manual nozzle	125	80 x 60 x 45	22	8915
Pump CENTRI SP30, 12 V, 30 L/min, automatic nozzle	125	80 x 60 x 45	20	10606
Pump CENTRI SP30, 12 V, 30 L/min, automatic nozzle	210	78.5 x 59.5 x 68.5	19	10978
Pump 12 V, 40 L/min, automatic nozzle	210	78.5 x 59.5 x 68.5	22	10980
Pump CENTRI SP30, 12V, 30 L/min, automatic nozzle, hinged lid	210	78.5 x 59.5 x 68.5	21	10981
Pump 12 V, 40 L/min, automatic nozzle, hinged lid	210	78.5 x 59.5 x 68.5	23	10983
Pump 24 V, 40 L/min, automatic nozzle, hinged lid	210	78.5 x 59.5 x 68.5	23	11104

Description	Dispensing volume pump	Capacity of battery	Max. volume (litre) per battery charge	Dimensions in cm (l x w x h)	Order no.
charger and battery included					
DT-Mobil EASY 210 L with hinged lid NEW	30 L/min	4 Ah	720	78.5 x 59.5 x 68.5	11601
Supplied without charger or battery – use your own CAS battery					
DT-Mobil EASY 210 L with hinged lid NEW	30 L/min	-	-	78.5 x 59.5 x 68.5	11594

Accessories: see page 44

CEMO DT MOBIL EASY pick-up 210 L PG 4

Diesel

The perfect solution for transport by pick-up truck.

- overall height 45 cm. Fits under the load area cover.
- with recess for tie-down straps to secure tank in load area

DT-Mobil EASY

certified for transport or for immediate consumption under ADR 1.1.3.1 c).

Container:

- Pick-up 210 L, polyethylene, single wall
- integral nozzle holder
- integral filler neck
- filler cap with vent and breather valves
- integral forklift pockets and handles
- integral recesses for fastening with tie-down straps during transport

Pre-installed pump:

- self-priming pump 12 V DC, 40 L/min, with auto shut-off nozzle, 4 m dispensing hose DN 19 and 4 m electrical cable
- submersible pump CENTRI SP 30, 30 L/min, extremely quiet, with 4 m dispensing hose DN 19 and 4 m cable or CAS battery



CENTRI SP 30
EXTREMELY QUIET


210 L with submersible pump CENTRI SP 30 and hinged lid



Pick-up 210 L with submersible pump CENTRI SP 30 12 V



Pick-up 210 L with pump 12 V

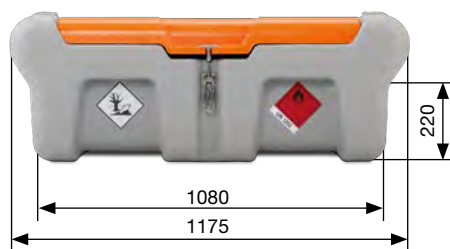

Pick-up 210 L with submersible pump CENTRI SP 30 18 V and CAS battery



Integral recesses for fastening with tie-down straps

DT-MOBIL EASY PICK-UP 210 L ACCORDING TO ADR 1.1.3.1 c)

Description / Capacity	Dimensions in cm (l x w x h)	Weight approx. kg	Order no.
DT-Mobil EASY pick-up 210 L with submersible pump CENTRI SP 30, 12 V, 30 L/min, and auto shut-off nozzle	118 x 79 x 45	26	11248
DT-Mobil EASY pick-up 210 L with 12V pump, 40 L/min, and auto shut-off nozzle	118 x 79 x 45	29	11249
DT-Mobil EASY pick-up 210 L with submersible pump CENTRI SP 30, 12 V, 30 L/min, auto shut-off nozzle and lid	118 x 79 x 45	30	11250
DT-Mobil EASY pick-up 210 L with pump 12 V, 40 L/min, auto shut-off nozzle and lid	118 x 79 x 45	34	11251
DT-Mobil EASY pick-up 210 L with pump 24 V, 40 L/min, auto shut-off nozzle and lid	118 x 79 x 45	34	11252

Description	Dispensing volume pump	Capacity of battery	Max. volume (litre) per battery charge	Dimensions in cm (l x w x h)	Order no.
DT-Mobil EASY Pick-up 210 L with hinged lid NEW	30 L/min	4 Ah	720	118 x 79 x 45	11627
Supplied without charger or battery – use your own CAS battery					
DT-Mobil EASY Pick-up 210 L with hinged lid NEW	30 L/min	-	-	118 x 79 x 45	11626

Accessories: see page 44

CEMO DT MOBIL EASY 440 L

CEMO DT MOBIL EASY COMBI 440/50 L PG 4

ACCORDING TO ADR 1.1.3.1 C)

DT-Mobil EASY

- container: 440 L and 440/50 L
- Description see page 38

COMBI versions with additional tank for AdBlue®:

with submersible pump CENTRI SP30, 4 m dispensing hose DN 19 and automatic nozzle



440 L Premium with automatic nozzle and meter




440/50 L COMBI with pump 12 V



440 L with quick coupling



440 L with pump 12 V

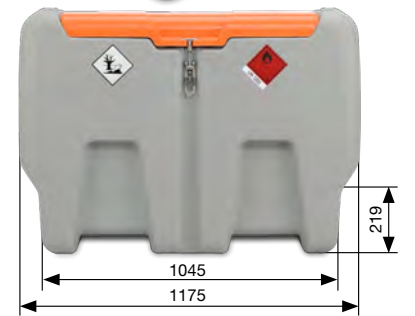

440 L and 440/50 L

DT-MOBIL EASY ACCORDING TO ADR 1.1.3.1 c)

Description	Capacity L	Dimensions in cm (l x w x h)	Weight approx. kg	Order no.
Quick coupling and hinged lid	440	118 x 80 x 71	35	11110
Submersible pump CENTRI SP30 SP30, 12 V, 30 L/min, extremely quiet, automatic nozzle	440	118 x 80 x 71	33	10984
Pump 12 V, 40 L/min, automatic nozzle	440	118 x 80 x 71	35	10985
Submersible pump CENTRI SP30, 12 V, 30 L/min, extremely quiet, automatic nozzle, hinged lid	440	118 x 80 x 71	36	10987
Pump 12 V, 40 L/min, automatic nozzle, hinged lid	440	118 x 80 x 71	39	10988
Pump 24 V, 40 L/min, automatic nozzle, hinged lid	440	118 x 80 x 71	39	11105
Premium, pump 12 V, 40 L/min, meter K24, hose reel with 8 m hose DN 19, automatic nozzle, hinged lid	440	118 x 80 x 85	62	11107
Premium, pump 24 V, 40 L/min, meter K24, hose reel with 8 m hose DN 19, automatic nozzle, hinged lid	440	118 x 80 x 85	62	11108

Description	Dispersing volume pump	Capacity of battery	Max. volume (L) per battery charge	Dimensions in cm (l x w x h)	Order no.
charger and battery included					
DT-Mobil EASY 440 L with CENTRI SP30, 18V, with hinged lid	NEW 30 L/min	4 Ah	720	118 x 80 x 71	11603
DT-Mobil EASY 440 L with Cematic 3000/18V, with hinged lid	NEW 40 L/min	4 Ah	900	118 x 80 x 71	11687
Supplied without charger or battery – use your own CAS battery					
DT-Mobil EASY 440 L with CENTRI SP30, 18V, with hinged lid	NEW 30 L/min	-	-	118 x 80 x 71	11596
DT-Mobil EASY 440 L with Cematic 3000/18V, with hinged lid	NEW 40 L/min	-	-	118 x 80 x 71	11686

DT-MOBIL EASY COMBI ACCORDING TO ADR 1.1.3.1 c)

Description	Capacity L	Dimensions in cm (l x w x h)	Weight approx. kg	Order no.
Submersible pump CENTRI SP30, 12 V, 30 L/min, extremely quiet, automatic nozzle, hinged lid	COMBI	118 x 80 x 85	51	10991
Pump 12 V, 40 L/min, automatic nozzle, hinged lid	440/50	118 x 80 x 85	54	10992
Pump 24 V, 40 L/min, automatic nozzle, hinged lid	440/50	118 x 80 x 85	54	11106

Accessories: see page 44

CEMO DT MOBIL EASY 200, 460 and 600 L PG 4

ADR CERTIFIED

Diesel



DT-Mobil EASY 600 L with electric pump, automatic nozzle and hinged lid



DT-Mobil EASY 200 L with electric pump, automatic nozzle and hinged lid



See catalogue page 153 for suitable steel bund SW 600/2

DT-Mobil EASY with ADR certification

certified for transport under ADR, examination every 2 ½ years according to ADR 6.5.4.4.1 b) and ADR 6.5.4.4.2 b).*** Completely assembled.

Container:

- 200 L, 460 L or 600 L polyethylene, single-walled
- with hinged lid (200 L version)
- with crane eyes (460 L and 600 L version)
- integral filler neck
- filler cap with vent and breather valves
- integral forklift pockets and handles
- integral recesses (200 L) or loops (460 L and 600 L) for securing with ratchet straps during transport

Pre-fitted pump:

- self-priming, pump 12 V or 24 VDC, 25 or 40 L/min, with automatic nozzle, 4 m dispensing hose DN 19 and 4 m electrical cable
- submersible pump CENTRI SP30, 12 V, 30 L/min, extremely quiet, with automatic nozzle, 4 m dispensing hose DN 19 and 4 m electrical cable
- hand pump 25 L/min, 2.7 m dispensing hose DN 19 and manual nozzle

*** Transport certification for all plastic IBCs is limited to a life of 5 years. The 200 L model is therefore also certified for transport for direct consumption under ADR 1.1.3.1 c). Please note that transport certification for all plastic IBCs is limited to a period of 5 years.

DT-MOBIL EASY WITH ADR CERTIFICATION

Description/Capacity	Dimensions in cm (l x w x h)	Weight approx. kg	Order no.
200 L with hand pump, manual nozzle and hinged lid	80 x 62 x 61	26	10080
200 L with submersible pump CENTRI SP30, 12 V, 30 L/min, automatic nozzle and hinged lid	80 x 62 x 61	24	10735
200 L with pump 12 V, 40 L/min, automatic nozzle and hinged lid	80 x 62 x 61	28	10082
200 L with pump 24 V, 40 L/min, automatic nozzle and hinged lid	80 x 62 x 61	28	10112
460 L without pump, with quick coupling for vehicles with integrated suction pump	116 x 80 x 81	42	10415
460 L with pump 12 V, 40 L/min and automatic nozzle	116 x 80 x 81	47	10416
460 L with pump 24 V, 40 L/min and automatic nozzle	116 x 80 x 81	47	10417
460 L with pump 12 V, 40 L/min, automatic nozzle and hinged lid	116 x 80 x 86	60	10418
460 L with pump 24 V, 40 L/min, automatic nozzle and hinged lid	116 x 80 x 86	60	10419
600 L without pump, with quick coupling for vehicles with integrated suction pump	116 x 80 x 102	48	10084
600 L with pump 12 V, 40 L/min and automatic nozzle	116 x 80 x 102	53	10085
600 L with pump 24 V, 40 L/min and automatic nozzle	116 x 80 x 102	53	10086
600 L with pump 12 V, 40 L/min, automatic nozzle and hinged lid	116 x 80 x 107	66	10087
600 L with pump 24 V, 40 L/min, automatic nozzle and hinged lid	116 x 80 x 107	66	10088

Accessories: see page 44

CEMO DT MOBIL EASY 460 and 600 L PG 4

ADR CERTIFIED AND WITH CAS BATTERY



NEW

DT-Mobil EASY with ADR certification certified for transport under ADR, examination every 2 ½ years according to ADR 6.5.4.4.1 b) and ADR 6.5.4.4.2 b)..***

- Completely assembled
- submersible pump Cematic 3000/18, 18 V, 40 L/min
 - totally mobile and cable-free, independent of vehicle batteries
 - very low self-discharge, no environmentally harmful heavy metals
 - no memory effect

- high intrinsic safety and integrated protection electronics (11689 and 11691)
- charger 220-240 VAC, output 18 V - 3A, included
- with hinged lid
- 4 m dispensing hose DN 19

DT MOBIL Easy 460 L with 18V pump Cematic 3000/18 and CAS battery

*** Please note that transport certification for all plastic IBCs is limited to a period of 5 years.

Description charger and battery included		Dispensing volume pump	Capacity of battery	Max. volume (litre) per battery charge	Dimensions in cm (l x w x h)	Order no.
DT-MOBIL EASY 460 L with Cematic 3000/18	NEW	40 L/min	4 Ah	900	116 x 80 x 86	11689
DT-MOBIL EASY 600 L with Cematic 3000/18	NEW	40 L/min	4 Ah	900	116 x 80 x 107	11691
Supplied without charger or battery – use your own CAS battery						
DT-MOBIL EASY 460 L with Cematic 3000/18	NEW	40 L/min	-	-	116 x 80 x 86	11688
DT-MOBIL EASY 600 L with Cematic 3000/18	NEW	40 L/min	-	-	116 x 80 x 107	11690



Accessories see page 44

Battery Systems, Li-Power-Block PG 4

SUITABLE FOR PUMPS WITH 12 VDC SUPPLY VOLTAGE

Lithium iron phosphate battery (LiFePO₄)

- totally mobile, independent of vehicle batteries
- 12.8 V nominal voltage, 3.3 Ah or 5.5 Ah capacity
- battery operating temperature range: -30°C to + 80°C
- very low self-discharge, no environmentally harmful heavy metals, no memory effect
- high intrinsic safety and integrated protection circuit, electrical protection class IP 67
- terminal protection caps protect against accidental short circuit
- easy to hang or carry due to rope handle
- includes charger 100 – 240 VAC, output 14.4 V – 3 A



Li-Power-Block with rope loop for easy hanging and carrying

BATTERY SYSTEMS, LI-POWER-BLOCK

Description	Order no.
Li-Power-Block 12.8 V - 3.3 Ah with charger Discharge volume of approx. 300-380 litres on a single charge, without idling, depending on the pump, charging time approx. 66 min.	10749
Li-Power-Block 12.8 V - 5.5 Ah with charger Sufficient for an output volume of approx. 500 – 630 litres without idling, depending on the pump, charging time approx. 110 min.	10750



CEMO DT MOBIL EASY 980 L

ADR CERTIFIED

Certified for transport under ADR. Examination every 2 ½ years according to ADR 6.5.4.4.1 b) and ADR 6.5.4.4.2 b).*** Completely assembled.

Container:

- 980 L polyethylene, single-walled
- integral baffle
- integral dispensing nozzle holder
- integral filler neck
- filler cap with vent and breather valves
- integral forklift pockets
- integral handles
- with crane eyes
- with flap lid

- integral loops for securing the trolley with ratchet lashing strap during transport

Basic versions:

with powerful electric pump, 4 m dispensing hose DN25 / 6 m with CENTRI SP 80 (without hose reel, meter and filter) and automatic nozzle

Premium versions:

with powerful electric pump, hose reel with 8 m hose DN25, flow meter, filter with water separator and automatic nozzle

Pumpen:


- Bipump 12 V, 500 W, approx. 85 L/min*
- pump Cematic Duo 24/12 V, 420 W, approx. 70/35 L/min*
- pump Cematic 72, 230 V, 500 W, approx. 72 L/min*
- submersible pump CENTRI SP80 AC, 230 V, 80 L/min*
- hand pump 60 L/min*



maintenance-free, high-performance submersible pump CENTRI SP80 AC, 230 V



DT-Mobil EASY 980

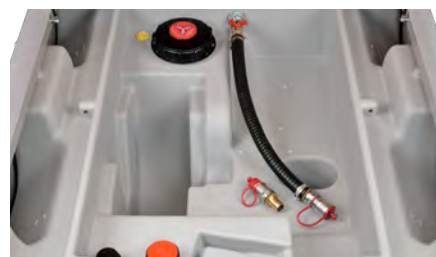

DT-Mobil EASY 980 without pump, with quick coupling




DT-Mobil EASY 980 Basic



DT MOBIL Easy 980 Basic with CENTRI SP80



DT MOBIL Easy 980 Premium with CENTRI SP80

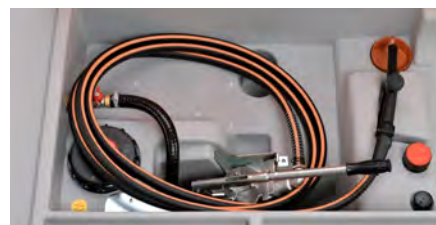

DT-Mobil EASY 980 with hand pump

DT-MOBIL EASY 980 L WITHOUT PUMP OR WITH HAND PUMP

Description	Capacity L	External dimensions cm (l x w x h)	Weight approx. kg	Order no.
980 without pump with quick coupling	980	127 x 107 x 112	95	10817
980 with hand pump 60 L/min, 4 m dispensing hose DN 19, manual nozzle	980	127 x 107 x 112	100	11025

DT-MOBIL EASY 980 L DIESEL TANK

Description	Capacity L	External dimensions cm (l x w x h)	Weight approx. kg	Electric pump version			
				Bipump 12 V	Cematic Duo 24/12 V	Cematic 230 V	CENTRI SP80 230 V
				Order no.	Order no.	Order no.	Order no.
980 Basic	980	127 x 107 x 112	107	10818	10822	10826	NEW 11647
980 Premium	980	127 x 107 x 112	130	10819	10823	10827	NEW 11648

* Pump output in free flow. Please note that the pump output can fall sharply depending on the length and cross-sectional area of the hose.

*** Please note that transport certification for all plastic IBCs is limited to a period of 5 years.

CEMO DT MOBIL EASY COMBI 850/100 L PG 4

ADR CERTIFIED

Certified for transport under ADR.
Examination every 2 ½ years according to ADR 6.5.4.4.1 b) and ADR 6.5.4.4.2 b).***
Completely assembled.

Container:

- 850/100 L polyethylene, single-walled (diesel/AdBlue® tank)
- integral baffle
- integral dispensing nozzle holder
- integral filler neck
- filler cap with vent and breather valves
- integral forklift pockets
- integral handles
- with crane eyes
- integral loops for securing the trolley with ratchet lashing strap during transport



DT-Mobil Easy COMBI 850/100 Premium

Basic versions:

with powerful electric pump, 4 m dispensing hose DN25 (without hose reel, meter and filter) and automatic nozzle

Premium versions:

with powerful electric pump, hose reel with 8 m hose DN25, flow meter, filter with water separator and automatic nozzle



DT-Mobil EASY COMBI 850/100 Premium

Pumps:

- pompe Bipump 12 V, 500 W, approx. 85 L/min*
- pompe Cematic Duo 24/12 V, 420 W, approx. 70/35 L/min*
- pompe Cematic 72, 230 V, 500 W, approx. 72 L/min*
- submersible pump CENTRI SP30 12 V, 220 W, approx. 25 L/min*
- hand pump 60L/min*

MBI versions

with additional tank for AdBlue®:

with submersible pump CENTRI SP30, 12 V, 5 m dispensing hose DN 19 and automatic nozzle

DT-MOBIL EASY COMBI 850/100 L DIESEL-/ADBLUE®-TANK

Description	Capacity L	External dimensions cm (l x w x h)	Weight approx. kg	Electric pump version diesel (AdBlue: CENTRI SP30 12 V)		
				Bipump 12 V Order no.	Cematic Duo 24/12 V Order no.	Cematic 230 V Order no.
850/100 Basic	850/100	127 x 107 x 112	121	10820	10824	10828
850/100 Premium	850/100	127 x 107 x 112	143	10821	10825	10829










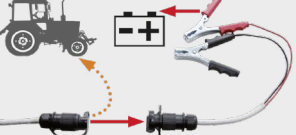
* Pump output in free flow. Please note that the pump output can fall sharply depending on the length and cross-sectional area of the hose.

*** Please note that transport certification for all plastic IBCs is limited to a period of 5 years.







CEMO DT MOBIL EASY PG 4

ACCESSORIES

Description	Order no.
 Lid for DT-Mobil EASY 125 L and 200 L (from year of construction 2011)	8963
 Hinged lid lock for DT-Mobil EASY 125 L and 200 L, complete with two keys	10214
 Hinged lid for DT-Mobil EASY 210 L	11062
Hinged lid for DT-Mobil EASY pick-up 210 L, 440 L and 440/50 L	11057
 Hinged lid for DT-Mobil EASY 430 L, 460 L, 600 L, 850/100 L and 980 L (can be hinged on right or left)	8833
 K24 Digital flow meter for 12 V and 24 V pumps, 40 L/min for DT-Mobil EASY 200 L	8832
K24 Digital flow meter for 12 V and 24 V pumps, 40 L/min for DT-Mobil EASY 430 L, 460 L and 600 L	8908
K24 Digital flow meter for DT-Mobil EASY 210 L, 440 L and 440/50 L	11111
K24 Digital flow meter for DT-Mobil EASY 850/100 L and 980 L	10905
 K33 flow meter for DT-Mobil EASY 980 L with hand pump	11171
 Contents gauge for DT-Mobil EASY 220 L	11256
Contents gauge for DT-Mobil EASY 440 L	11058
Contents gauge for DT-Mobil EASY 440 L/50 L	11059
Contents gauge for DT-Mobil EASY 850/100 L and 980 L Contents gauge for DT-Mobil EASY 850/100 L and 980 L (from year of manufacture 2021)	11503
 Contents gauge for DT-Mobil EASY 430 L and 460 L	8881
 Contents gauge for DT-Mobil EASY 600 L	10089
Contents gauge for DT-Mobil EASY 850/100 L and 980 L Contents gauge for DT-Mobil EASY 850/100 L and 980 L (until year of manufacture 2020)	10830
 Oil-resistant anti-slip mat for DT-Mobil EASY 125 L, 200 L and 210 L, oil- and weather-resistant	10166
Oil-resistant anti-slip mat for DT-Mobil EASY 430 L, 440 L, 440/50 L, 460 L and 600 L, oil- and weather-resistant	10167
 DIN 9680 plug, 3-pin, 6 - 24 V, max. 25 A, IP 54	10229
 DIN 9680 socket, 3-pin, 6 - 24 V, max. 25 A, IP 54	10230
 Adhesive label set for retrofitting to DT-Mobil EASY	10261

ACCESSORY FOR DT-MOBIL EASY WITH CAS BATTERY

 ① charger ASC55, 220 - 240 VAC, 3 A, CAS	NEW	11385
 ② Li-Power battery 18 V / 2,0 Ah CAS	NEW	11386
 ③ Li-Power battery 18 V / 4,0 Ah CAS	NEW	11387
 ④ Li-HD battery 18 V / 8,0 Ah CAS	NEW	11388

Mobile tank systems for diesel ADR CERTIFIED


CEMO CUBE MOBIL 980 L PG 4

Certified for transport under ADR.

Examination every 2 1/2 years according to ADR 6.5.4.4.1 b) and ADR 6.5.4.4.2 b).***

Certified as storage tank with General Construction Inspection Certification Z-40.21-589

- compact design, easy to use
- with integral baffle
- with integral bund
- with visual leak indicator
- integral filler neck
- filler cap with vent and breather valves
- contents gauge
- 1" suction line with shut-off valve automatic nozzle with dispensing nozzle holder
- with lockable lid
- integral forklift pockets
- integral handles
- fully assembled



bunded tank offers twice the safety

ergonomic and compact

forkliftable

certified for storage and transport



CUBE Mobil 980 L Premium

Basic version

with high-performance pump, 4 m dispensing hose DN 25 (without hose reel, flow meter and filter) and automatic nozzle

Premium version


with high-performance pump, hose reel with 8 m hose DN 25, flow meter, filter with water separator and automatic nozzle

Pumps

Bipump pump, 12 V, 500 W, approx. 85 L/min*

Cematic Duo pump, 24/12 V, 420 W, approx. 70/35 L/min*

Cematic 72 pump, 230 V, 500 W, approx. 72 L/min*

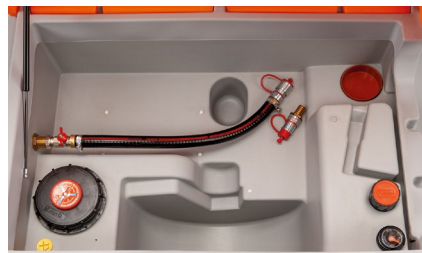

Version without pump with quick coupling



Version with hand pump 60 L/min



Basic version with Cematic Duo, 24/12 V



Premium version with Bipump, 12 V

CEMO CUBE MOBIL 980 L WITHOUT PUMP OR WITH HAND PUMP

Description	Capacity L	Dimensions in cm (l x w x h)	Weight approx. kg	Order no.
980 without pump with quick coupling	980	130 x 112 x 118	102	11677
980 with hand pump 60 L/min, 4 m dispensing hose DN 19, manual nozzle	980	130 x 112 x 118	117	11678

CEMO CUBE MOBIL 980 L WITH ELECTRIC PUMP

Description	Capacity L	Dimensions in cm (l x w x h)	Weight approx. kg	Electric pump version		
				Bipump 12 V	Cematic Duo 24/12 V	Cematic 230 V
980 Basic	980	130 x 112 x 118	123	Order no. 11632	Order no. 11634	Order no. 11636
980 Premium	980	130 x 112 x 118	145	Order no. 11633	Order no. 11635	Order no. 11637

* Pump output in free flow. Please note that the pump output can fall sharply depending on the length and cross-sectional area of the hose.

*** Please note that transport certification for all plastic IBCs is limited to a period of 5 years.