




IQAN-MD5 **Display Modules** Electronic Control Systems

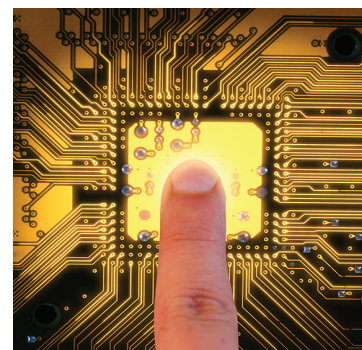

ENGINEERING YOUR SUCCESS.

Application

The IQAN-MD5 is a family of display units, fully compliant with the IQANdesign platform system. The IQAN-MD5 is fully programmable for use in any machine application for primary use as a display in the IQAN ecosystem. The units have full graphical, diagnostic, and CAN gateway capabilities and are used with the easy IQAN programming tools. Together with the multi-master functionality in IQANdesign, it is recommended to use the IQAN-MD5 as a display.

The IQAN-MD5 comes in four sizes: 5", 8" and 10.1" in a wide format and 12.3" in a super wide format. Active display areas are 11x6.5cm, 17.5x10cm, 21.5x13.5cm, and 29x11cm.

The IQAN-MD5 family is designed to be weatherproof for outdoor use and withstand the mechanical environment of mobile off-road machinery.

Mechanical

The IQAN-MD5 displays have a rugged mechanical design with no moving parts and are completely sealed. The use of optically bonded display glass improves readability, avoids light refraction, and eliminates possible condensation since there is no air between the glass and LCD.

Display

The display units have a pleasing, aesthetic design that blends with modern cabin designs. A touchscreen interface is offered for interactive, intuitive HMI. The IQAN-MD5 is available with IP camera support, so there is no need for separate camera monitors. Virtually an unlimited number of cameras can be connected if connected via an IP switch.

Mounting is easy. Well-integrated, flush mount in cabin panels, or as a stand-alone mount compatible with RAM™ mount components. The displays may be mounted in landscape or portrait orientation for easy integration of HMI or mechanics.

Develop HMI with IQANdesign

The IQAN software tools are designed to be user-friendly and efficient, enabling both beginners and experts to create sophisticated and stylish interfaces quickly.

Key features like *Predefined Building Blocks*, *Guided Development*, *Drag-and-Drop Design*, *Auto-Generated Diagnostic Measurements and Adjustments*, *High-Level Toolchain*.

These features make the IQAN-MD5 family a powerful tool for anyone involved in HMI and machine control design. They streamline the design process, making it faster and more efficient, and they make the process more accessible to users of all skill levels.

Specifications

General

Operating temperature	-30 to 70 °C
Storage temperature	-40 to 90 °C
Protection	IP65
Voltage supply	9-32 Vdc
Weight (5"/8"/10"/12")	430/750/1000/1150 (g)
Current supply 28V (idle)	180/410/430/490 (mA)
Current supply 14V (idle)	340/790/790/930 (mA)
Current supply RTC	~2 mA (28 Vdc) ~1 mA (14 Vdc)
Compliance marking	CE, UKCA, E-mark R10

Performance

Processor	4xCortex A53, (1.25 GHz)
Memory	8 GB Flash 512 MB DRAM
Cycle time	50 to 100 ms

Communication interface

CAN (2.0B/FD)	3
Protocols	IQAN proprietary, SAE J1939 and generic CAN
Ethernet 100Base-Tx	
IQAN-MD5-5	1
IQAN-MD5-8/10/12	2

Display

Touch Interface	PCAP
5" (14 cm) display	16:9, 800x480 pixels
8" (22 cm) display	16:9, 1280x720 pixels
10.1" (27 cm) display	16:10, 1280x800 pixels
12.3" (32 cm) display	21:8, 1920x720 pixels
Backlight	LED

Connection

Electrical connection	1 x Molex MX123, 56 pos
-----------------------	-------------------------

Outputs

Digital outputs	2 x LS / 300 mA 1 x 5 Vdc / 150 mA
-----------------	---------------------------------------

Inputs

Digital inputs	8 ¹
Encoder input	2 ¹
Signal range	0 - 500 Hz, 50/50 signal

1) The inputs share the same physical pins. The user defines the channels/pins with IQANdesign.

Model code

IQAN - MD5 - X

Code	Description	Ratio
5	display, 5"	16:9
8	display, 8"	16:9
10	display, 10.1"	16:10
12	display, 12.3"	20:8

Ordering part numbers

IQAN-MD5-5	20085201
IQAN-MD5-8	20085202
IQAN-MD5-10	20085203
IQAN-MD5-12	20085204

Environmental Protection

EMC harmonized standards

ISO 14982:2009, ISO 13766:2018

Climate environment


- ISO 20653-2013 IP65 (water)
- IEC 60068-2-30:2005 Db (damp heat, cyclic)
- IEC 60068-2-78:2001 Cab (damp heat, steady state)
- IEC 60068-2-2:2007 Bb (heat)
- IEC 60068-2-1:2007 Ab (cold)
- IEC 60068-2-14:2009 Nb (change of temperature)
- IEC 60068-2-52:2017 Kb (salt mist, cyclic)

Mechanical environment

- IEC 60068-2-64:2008 Fh (random)
- IEC 60068-2-27:2008 Ea (bump)

See the IQAN-MD5 instruction book for further information.

It has never been easier to design a graphical user interface for your machine. With IQANdesign and the IQAN-MD5 family you have a what-you-see-is-what-you-get experience, by using built-in display controls such as gauges, touch screen buttons, indicator lamps and much more. Simply drag and drop the controls where you want them and change their properties to get your desired look and feel. You can even test drive your user interface directly on your PC to see how your design behaves.

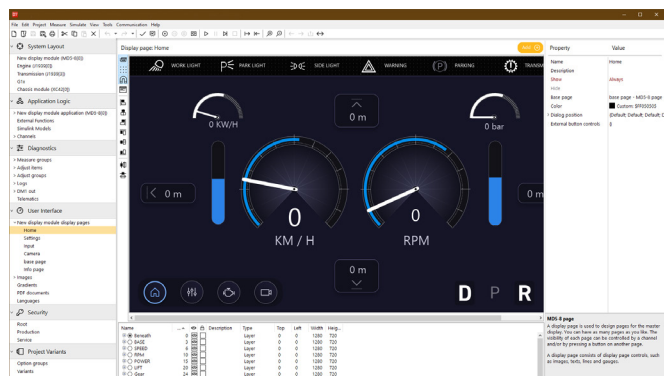

A large graphics library with different gauge dials, all the common ISO standard symbols and much more is included in IQANdesign. Layers, groups, snap and align are helpful tools when designing complex graphical user interfaces. Space-saving controls, such as containers for lamp indicators that automatically only show the most critical errors or alarms, or for buttons that can be expanded when needed, are available, right out of the box.


Display pages are used to display necessary information in different situations to the machine operator. The difference between this display and a "traditional" operator or driver environment is that all the information does not necessarily need to always be shown. By using several dedicated display pages it is possible to show enough of the correct information in different situations. A page can be configured to be shown by a trigger, for example the press of a button or when the driver seat is turned backward.



The display pages are well-integrated with your application

IQANdesign and the IQAN-MD5 family have support for multiple languages. Every text displayed on the IQAN-MD5 can easily be translated into any language you like. Non-western languages, such as East Asian languages, can of course be used.


The IQAN-MD5 family comes with a pre-defined system menu with all the operations and settings you need. It is of course configurable by IQANdesign. You can define exactly what the machine operators will be able to measure and adjust and which logs they will be able to view. Measurements can be performed on groups of items and even graphically to let you see trends and correlations. Adjusting is done with user-friendly controls, such as sliders or up/down buttons.

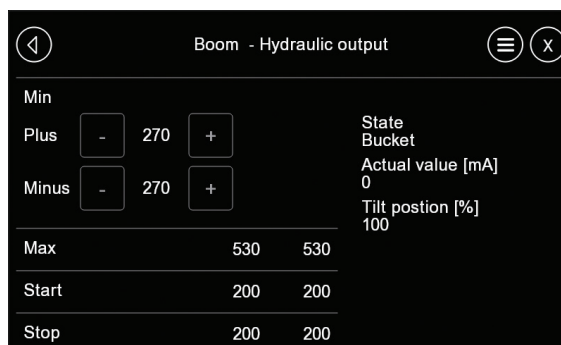

The system menu is easy to navigate using the touch screen or an external encoder. It has a modern and neutral look that you can customize by yourself to fit your graphical profile. Both icons and text are used to make it clear where to click and where you are in the menu hierarchy.

Sensitive items can be protected by either PIN codes or login with a username and password. The built-in on-screen keyboard is used when entering PIN codes or logging in.

unit = mm

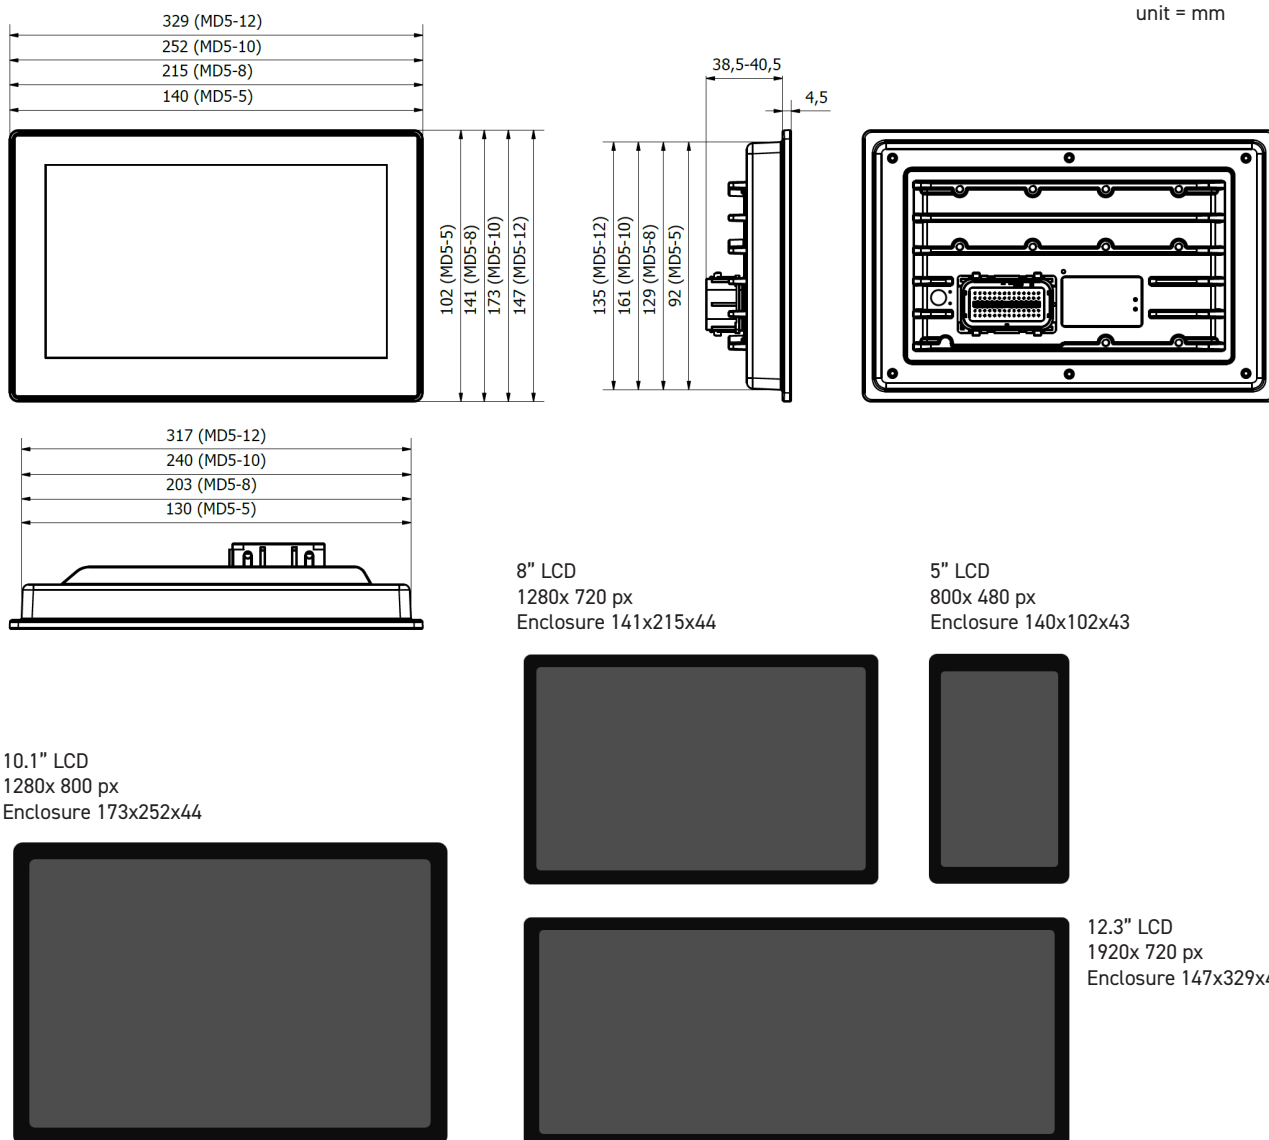

WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application, including consequences of any failure, and review the information concerning the product or system in the current product catalogue. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

Please contact your Parker representation for a detailed "Offer of Sale".