

Switch - short lever


Coding: 104. **T**. **F**¹. 6.30. **S**. **W**. **F**²

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous
Max. working pressure (bar)	10
Temperature °C	-5 ... +70
Flow rate at 6 bar with Δp=1 (Nl/min)	90
Orifice size (mm)	2.5
Working ports size	ø4 tube

T	TYPE	S	SWITCH POSITION (only for 5/3 ways)
	22 = 2 ways, 2 positions		0 = 3 instable positions
	32 = 3 ways, 2 positions		1 = 3 stable positions
F ¹	52 = 5 ways, 2 positions	W	CONNECTION TYPE
	53 = 5 ways, 3 positions		L = Lateral
	FUNCTION 1 (only for 5/3 ways)		P = Rear
F ²	32 = Open centres	F ²	FUNCTION 2 (only for 2/2 or 3/2 ways)
	33 = Pressured centres		A = Normally Open
			C = Normally Closed


2/2 - 3/2 - Lateral connections

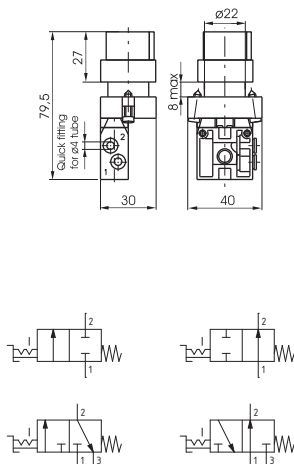

Weight 65 g
Switch 2 positions stable

104. **T**. 6.30. **L**. **F**²


2/2 - 3/2 - Rear connections

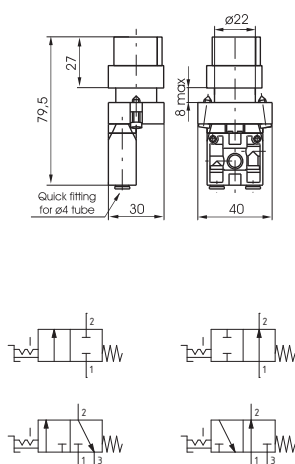

Weight 65 g
Switch 2 positions stable

104. **T**. 6.30. **P**. **F**²


5/2 - Lateral connections

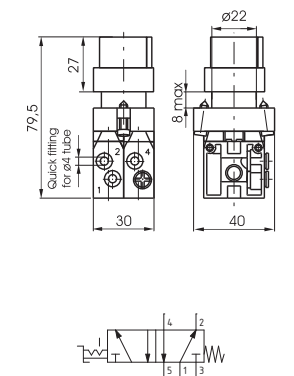

Weight 120 g
Switch 2 positions stable

104.52.6.30. **L**


5/2 - Rear connections

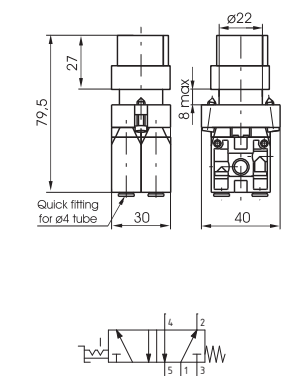

Weight 120 g
Switch 2 positions stable

104.52.6.30. **P**


5/3 - Lateral connections

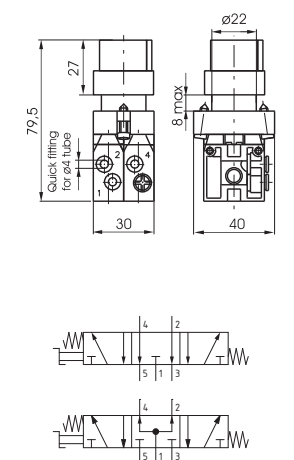

Weight 120 g

104.53. **F**¹. 6.30. **S**. **L**

5/3 - Rear connections

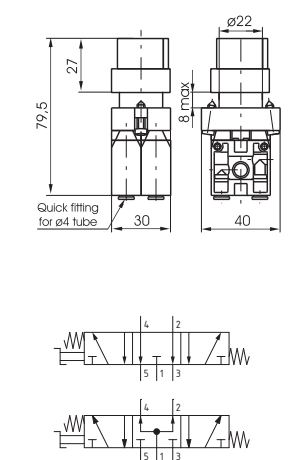

Weight 120 g

104.53. **F**¹. 6.30. **S**. **P**