


Solenoid valve S and S/1



Weight 220 g


Normally Closed
(N.C.) - S



Normally Open
(N.O.) - S/1




Ordering code		Available voltages Coil	
S 2	S 2/1	6 D.C.	Direct current
S 4	S 4/1	12 D.C.	
S 5	S 5/1	24 D.C.	
S 6	S 6/1	48 D.C.	
S 16	S 16/1	12/50	Alternating current 50 Hz
S 17	S 17/1	24/50	
S 19	S 19/1	32/50	
S 20	S 20/1	42/50	
S 21	S 21/1	48/50	
S 22	S 22/1	110/50	
S 23	S 23/1	115/50	
S 24	S 24/1	230/50	
S 36	S 36/1	12/60	Alternating current 60 Hz
S 37	S 37/1	24/60	
S 38	S 38/1	48/60	
S 39	S 39/1	110/60	
S 40	S 40/1	115/60	
S 41	S 41/1	230/60	
S 56	S 56/1	24/50-60	Alternating current 50/60 Hz
S 57	S 57/1	110/50-60	
S 58	S 58/1	230/50-60	

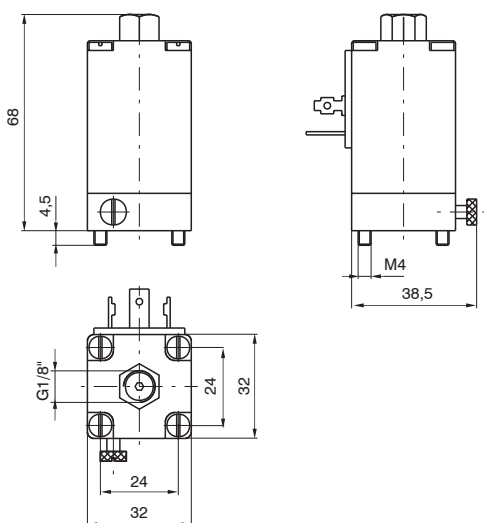


Closing plate

Ordering code

300.12.00



Weight 14 g

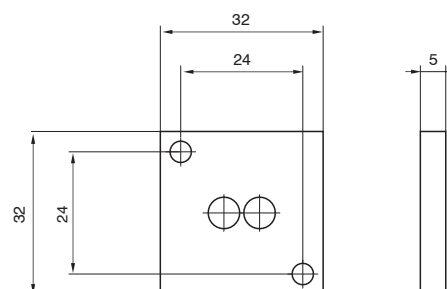


External feeding base

To be used with electrodistributedors to get a different piloting pressure from the line one.

Ordering code

300.10.05



Weight 35 g

