

**R130G25B** 




## printed on: 30-10-2023



## **TECHNICAL INFO**

Media type	INORGANIC FIBERGLASS
Efficiency	20 μm <sub>(c)</sub> βx ≥ 200
Efficiency 1	22 μm <sub>(c)</sub> βx ≥ 1000
Flow direction	OUT-IN
Collapse ∆p	10 bar
Bypass setting	1.7 bar
Seals	NBR
Temperature range	-30°C +100°C

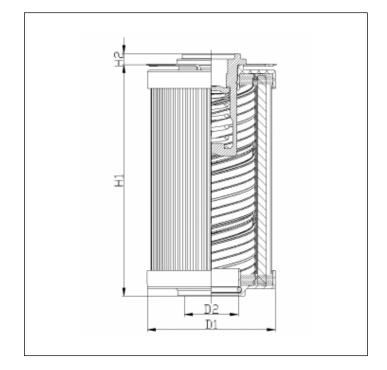

## **OVERALL DIMENSIONS**

D1	70,0 mm
D2	40,5 mm
H1	208,5 mm
H2	6,0 mm

Technical information may change without notice. Image and drawing are representative only