

R611G10




printed on: 06-03-2024



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	10 μm _(c) βx ≥ 200
Efficiency 1	12 μm _(c) βx ≥ 1000
Flow direction	OUT-IN
Collapse ∆p	10 bar
Bypass setting	2.5 bar
Seals	NBR
Temperature range	-30°C +100°C

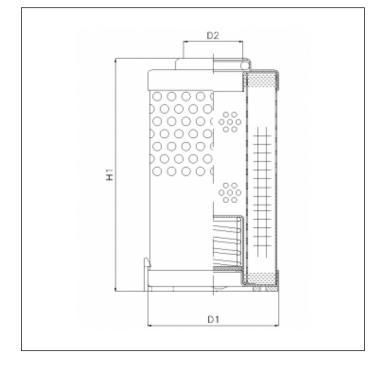

OVERALL DIMENSIONS

D1	45,5 mm
D2	20,5 mm
H1	104,0 mm

Technical information may change without notice. Image and drawing are representative only