


U122G03V/ESD

printed on: 29-07-2023



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	5 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	7 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	IN-OUT
Burst Δp	10 bar
Seals	FKM
Temperature range	-25°C +120°C
Note	ANTI-ESD FILTER ELEMENT

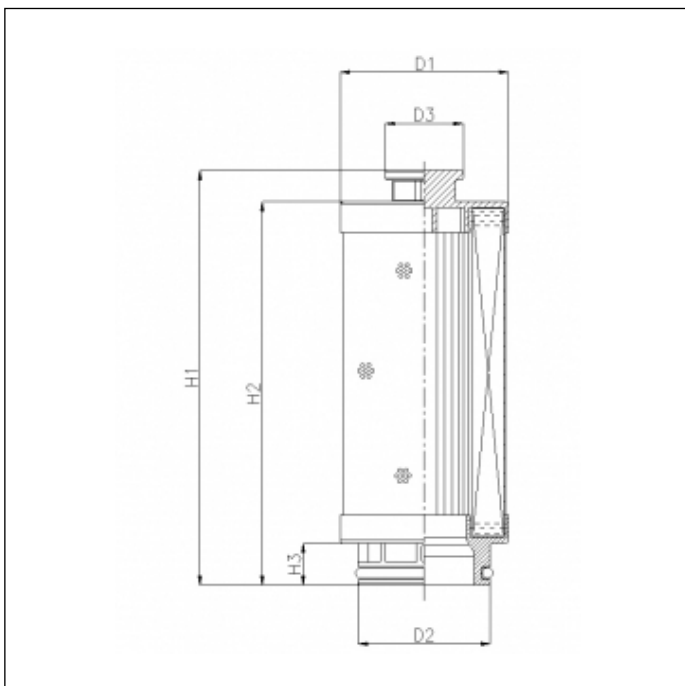

OVERALL DIMENSIONS

D1	54,0 mm
D2	42,5 mm
D3	25,0 mm
H1	367,0 mm
H2	343,5 mm
H3	13,5 mm