




▼ U562G03B3




printed on: 01-08-2025

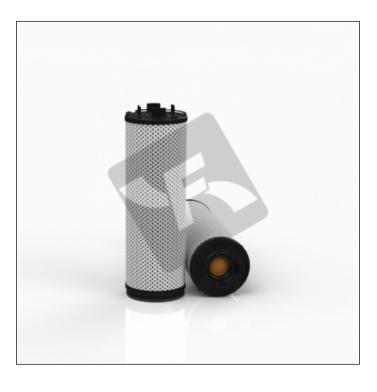

TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	<4 μm _(c) βx ≥ 200
Efficiency 1	$5 \mu m_{(c)} \beta x \ge 1000$
Flow direction	OUT-IN
Collapse Δp	10 bar
Bypass setting	3.0 bar
Seals	NBR
Temperature range	-30°C +100°C
	-

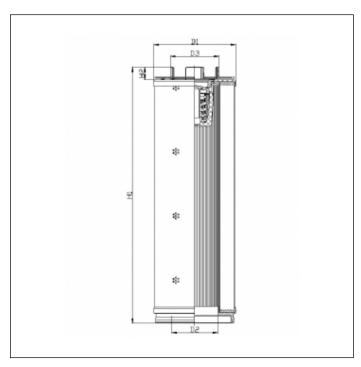

OVERALL DIMENSIONS

D1	153,0 mm
D2	86,0 mm
D3	90,5 mm
H1	478,0 mm
H2	23,5 mm

Technical information may change without notice. Image and drawing are representative only