


TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	$<4 \mu\text{m}_{(c)} \beta_x \geq 200$
Efficiency 1	$5 \mu\text{m}_{(c)} \beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	30 bar
Seals	FKM
Temperature range	-25°C +120°C

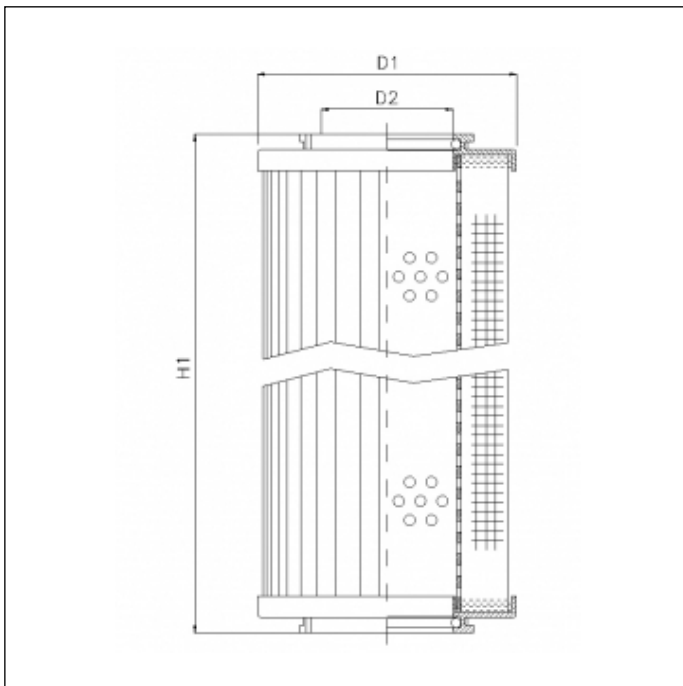

OVERALL DIMENSIONS

D1	94,5 mm
D2	48,1 mm
H1	265,0 mm