



XD630G25A




printed on: 10-06-2025



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	20 μ m _(c) β x ≥ 200
Efficiency 1	22 μ m _(c) β x ≥ 1000
Flow direction	OUT-IN
Collapse Δp	21 bar
Seals	NBR
Temperature range	-30°C +100°C

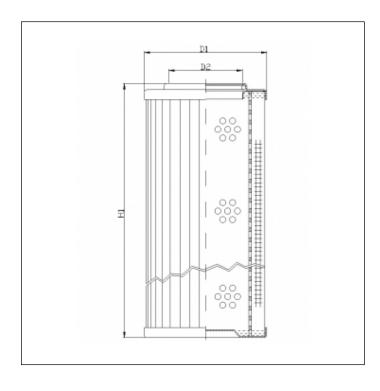

OVERALL DIMENSIONS

D1	100,0 mm
D2	60,2 mm
H1	399,0 mm

Technical information may change without notice. Image and drawing are representative only