


## Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

<b>Creation Date:</b>	17-12-2018
<b>Datasheet No:</b>	DS719W
<b>Parker Part No:</b>	938312Q
<b>OEM:</b>	Hydac
<b>OEM Part No:</b>	2600R010BN4HC

### Product Dimensions

<b>A (mm)</b>	143.5	<b>(inch)</b>	5.65
<b>C (mm)</b>	96.5	<b>(inch)</b>	3.80
<b>D (mm)</b>	143.5	<b>(inch)</b>	5.65
<b>E (mm)</b>	921.0	<b>(inch)</b>	36.26
<b>G (mm)</b>	95.5	<b>(inch)</b>	3.76
<b>H (mm)</b>	24.5	<b>(inch)</b>	0.96

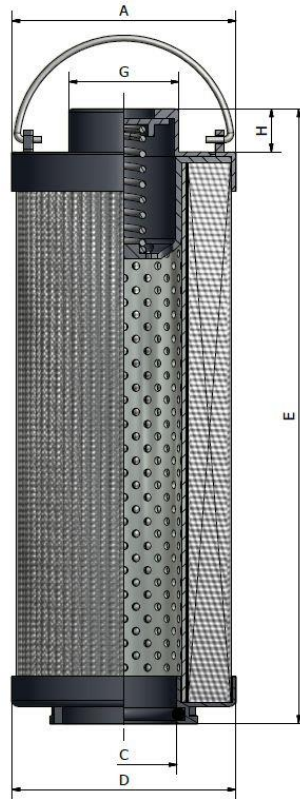

### Construction Materials

<b>Seal(s):</b>	FPM: Fluoroelastomer
<b>Top Endcap:</b>	Glass reinforced nylon
<b>Bottom Endcap:</b>	Glass reinforced nylon
<b>Inner Support Cylinder:</b>	Mild steel tin plated
<b>Filter Media:</b>	Multilayer fibreglass with coated mesh on both sides

### Calculated Performance Criteria

<b>Differential Pressure (<math>\Delta p</math>):</b>	0.36 bar @ 2600 l/min
<b>Tested to ISO3968 @ 32 cSt</b>	5.22 psi @ 571.92 gp
<b>Efficiency:</b>	>Beta 200 @ 10 microns & greater >Beta 1000 @ 12 microns & greater
<b>Minimum Collapse Pressure:</b>	>20 bar
<b>Tested to ISO2941</b>	>290 psi
<b>Dirt Holding Capacity acc. to ISO16889</b>	240.1 gram @ 4 bar terminal pressure drop 240.1 gram @ 58 psi terminal pressure drop