



Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

 Creation Date:
 17-12-2018


 Datasheet No:
 DS1101W

 Parker Part No:
 938343Q

 OEM:
 MP Filtri

 OEM Part No:
 HP1351A10VN&AN

Product Dimensions			
A (mm)	53.0	(inch)	2.09
B (mm)	27.5	(inch)	1.08
D (mm)	53.0	(inch)	2.09
E (mm)	120.0	(inch)	4.72

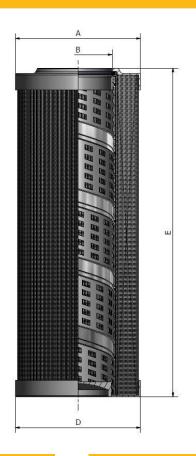



Construction Materials			
Seal(s):	FPM: Fluoroelastomer		
Top Endcap:	Mild steel tin plated		
Bottom Endcap:	Mild steel tin plated		
Inner Support Cylinder:	Mild steel tin plated		
Filter Media:	Multilayer fibreglass with coated mesh on both sides		

Calculated Performance Criteria

 Differential Pressure (Δp):
 0.57 bar @ 150 l/min

 Tested to ISO3968 @ 32 cSt
 8.27 psi @ 33.00 gpm

Efficiency: >Beta 200 @ 10 microns & greater

>Beta 1000 @ 12 microns & greater

Minimum Collapse Pressure: >20 bar **Tested to ISO2941** >290 psi

Dirt Holding Capacity acc. to ISO16889

>11.2 gram @ 7 bar terminal pressure drop >11.2 gram @ 102 psi terminal pressure drop

